





4 USB Outputs



100W PD Type-C Output



4 x AC Outputs at 300W (320W Max)



Pure Sine Wave



5 x DC Outputs (180W Max)



4 modes LED Light Display

1

## Three Ways to Charge

Whether you're at home, in your car, or enjoying the great outdoors, the Pion Power P302 can be easily recharged using its versatile charging options, which include AC charging, solar panel, and car charging



100W Pion Power Solar Panels







AC charging (60W)





Car Charger





# Provide Enough Power for Your Weekend Getaway

No matter where your outdoor excursions take you, the Pion Power P302's 300W AC output ensures you'll have enough power to keep all your essential devices and equipments running, so you can focus on enjoying your adventure.







## Light up your path


Be ready for any emergency with the Pion Power P302's versatile lighting capabilities, featuring four LED light modes for indoor lighting, SOS, and vehicle emergency lighting.





Never run out of power again with the Pion Power P302 - your go-to portable power source. Its compact design makes it easy to carry and the P302 keeps you powered up and connected, no matter where your adventures take you.



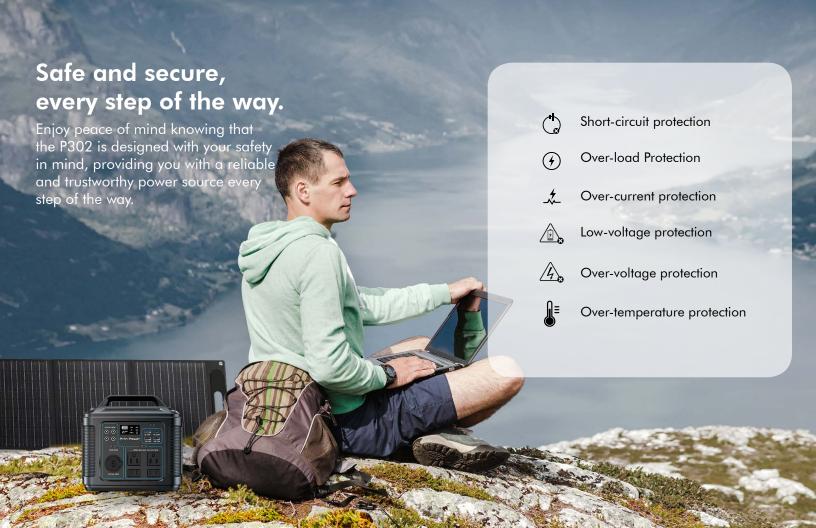

## Specification

Battery Info	Capacity:	296Wh, 20Ah/14.8V (equivalent to 80,000mAh, 3.7V)	Cell Chemistry:	Lithium-ion
	Lifecycle:	500 cycles to 80%+ capacity	AC Power:	300W (Surge 500W 1s)
Output	Inverter Type:	Pure Sine Wave	AC Output:	4 x 110V, 300W (320W Max)
	USB-A Output:	2 x 5V, 4A (Max), 10W	DC Output:	4 x 12V, 10A,180W Max
	USB-C Output:	1 x 9V, 2A, 5V/12V/15V, 3A or 20V, 5A (Max), PD 100W	Car Output:	1 x 12V, 5A 150W Max
	Quick Charge 3.0 Output:	1 x 5V/9V, 2A or 12V, 1.5A, 18W		
LED Light	Power	10W	Modes	Weak, Medium, Strong, SOS
	Lumens	up to 500 Lumens		
Recharge	Input Port:	DC 5521	AC Adaptor:	DC 15V, 4A, 60W
	Solar Input:	DC 5.5-25V, 4A, 60W Max	Car Input:	12V, 4A
General	Dimensions:	8.5 x 5.9 x 8.1 in (21.5 x 15 x 20.5cm)	Weight:	6.6 lbs (3 kg)
	Operating Temperature:	32°F-104°F (0°C-40°C)	Storage Temperature:	32°F-104°F (0°C-40°C)
	Certifications:	CE, FCC, ROHS	Product Warranty:	2-year Product Warranty

#### Specification(Solar Panel)

Power			
Peak Power:	100W±5%	Cell Type:	Monocrystalline Silicon
Cell Efficiency:	22%±1%	Peak Voltage:	19.8V±5%
Peak Current:	5.05A±5%	Lamination:	ETFE
Output			
MC4		Type-C:	PD3.0 5V/9V/12V/15V (3.0A)
DC 5521:	Max 6A	USB 1:	Max 18W (5V/3A, 9V/2A, 12V/1.5A)
		USB 2:	Max 15W (5V/3A)
General			
Operating Temperature:	-20°C to 75°C	Dimensions (Unfolded):	64.6 x 16.5 x 0.16 in (164 x 42 x 0.4 cm)
Weight:	8.8 lb (4kg)	Dimensions (folded):	18.5 x 21.3 x 0.8 in (47 x 54 x 2 cm)
Warranty	24 Months	Accessories:	1 x 3 ft 16AWG Dual DC 5521 Cable, 10-pc DC 5521 Adaptors



100W

<sup>\*</sup>If you have any confusion or questions, please don't hesitate to reach out to the Pion Power support team at support@pionpower.ca.

#### PION POWER

ONTARIO, CANADA

Address: 3761 Victoria Park Ave #9, Scarborough, ON M1W 3S2

Phone: +1 (416) 756-9210

Email: support@pionpower.ca

http://www.pionpower.ca